

Jacuzzi J-225

Specifications

Seating Capacity.....	4-5 Adults
Dimensions	80" x 80" x 33" (203 cm x 203 cm x 84 cm); For Complete Dimensions, See page 82
Dry Weight.....	619 lbs (281 kg)
Filled Weight (Spa Volume)	3,805 lbs (1,726 kg)
Filled Weight (Average Fill).....	2,954 lbs (1,340 kg)
Water Capacity (Spa Volume) ...	382 US gallons (1,446 Liters)
Water Capacity (Average Fill) ...	280 US gallons (1,060 Liters)
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
Pump 1.....	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame
Export (50 Hz):	2-Speed, 2.0 HP continuous
Circulation Pump.....	No
Total Jets	26
Seat A Jets	3 SL3 Directional, 1 SL5R Rotational
Seat B Jets	1 SLR Rotational, 1 SL3 Directional, 8 SL Directional
Seat C Jet	1 SL3R Rotational
Seat D Jets	6 SL3 Directional
Seat E Jets	4 SL3R Rotational
Massage Selectors	None
Air Controls.....	2
Water Management System	One 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System
Export (50 Hz):	ClearRay® UV-C System
LED Lighting	LED Lighting System (Interior Surround); Standard Exterior Light
Cabinet Colors	Smoked, Charcoal
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	4
Heater:.....	North America (60 Hz): 120V 1kW or 240V 4.0 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 120V@15A (GFCI cord) 240 VAC@30A or 40A Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*.....	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional)	SmartTub® Module
Audio System (Optional).....	N/A



Jacuzzi J-225

Operation/Seat Depths



Air Control 1:
Opens/Closes
Air Inlet to Jet
Group A

Air Control 2:
Opens/Closes
Air Inlet to Jet
Group B

Jets are always on
when the Jets Pump 1
is running.

26 Total Jets



SL Jets (8)



SLR Jets (2)



SL3 Jets (10)



SL3R Jets (5)



SL5R Jets (1)

Spa Operation Subject to Change without Notice

Seat Depths

A = 23.50" (59.69 cm)

B = 21.00" (53.34 cm)

C = 27.25" (69.22 cm)

D = 21.88" (55.56 cm)

E = 23.88" (60.64 cm)

F = 21.50" (54.61 cm)

G = 26.00" (66.04 cm)

H = 17.50" (44.45 cm)

I = 28.00" (71.12 cm)


Listed dimensions
represent distance from
top of acrylic to lowest
point in seat. Tolerance
± 0.5" (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-225


Dimensions

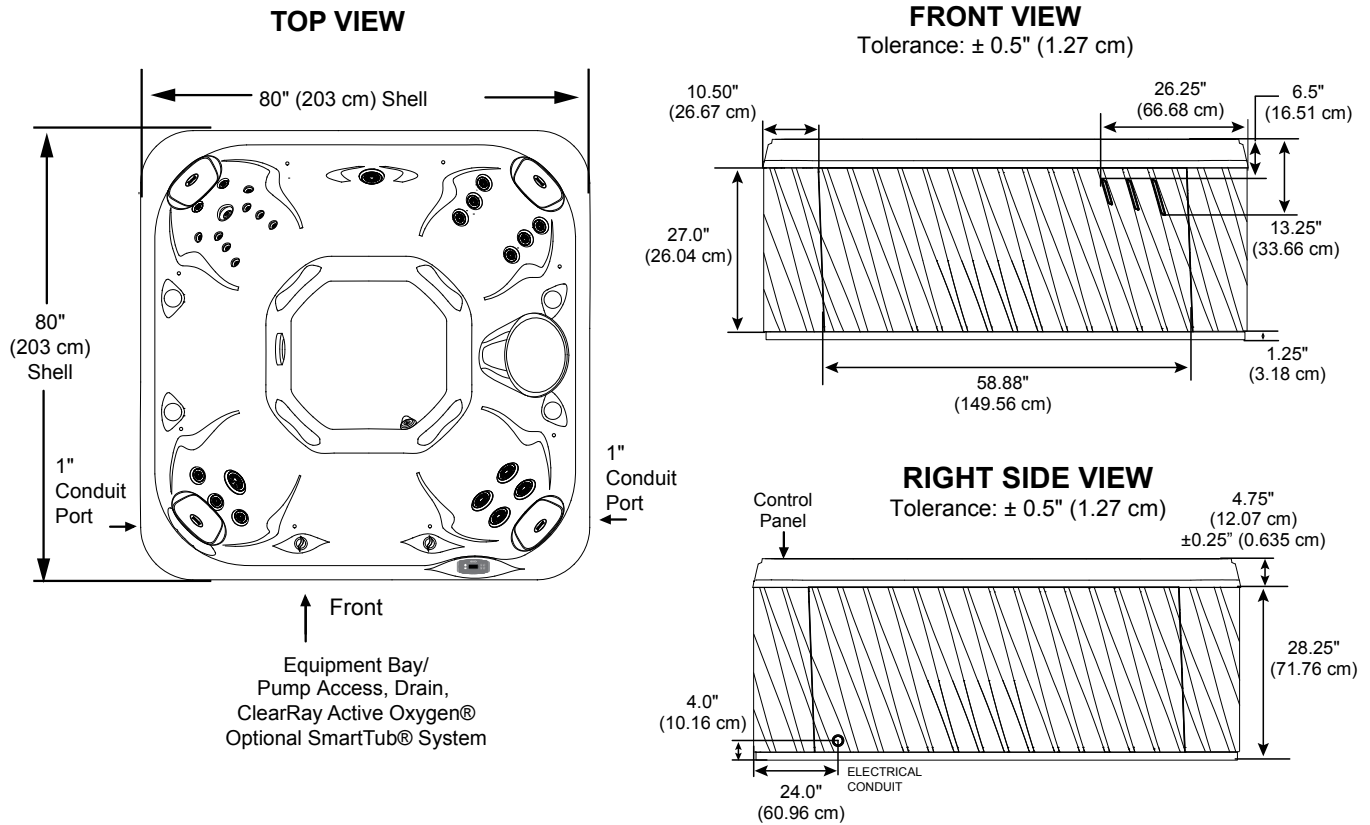

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



Cabinet Radius:
 $\approx 10.0"$ (25.4 cm)

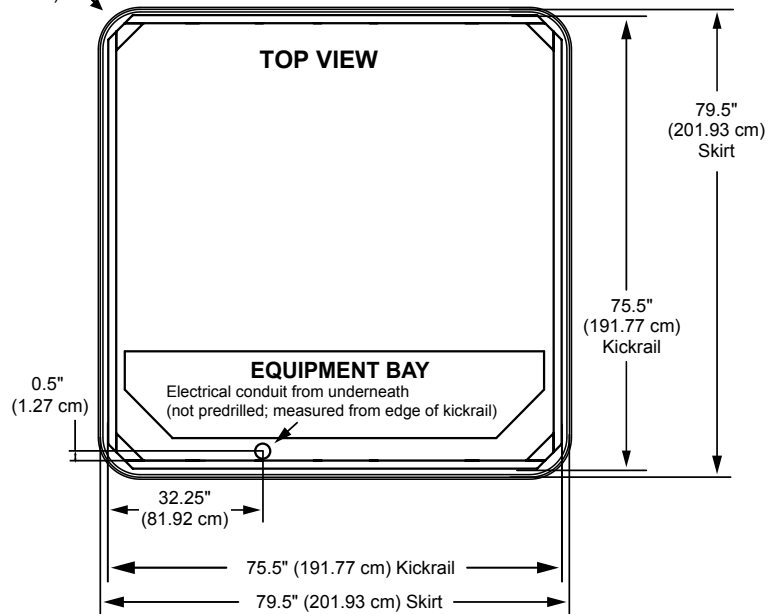

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)