

Jacuzzi J-485


Specifications

Seating Capacity	6-7 Adults
Dimensions	91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.5 cm Back); For complete dimensions, See page 79
Dry Weight	916 lbs (415 kg)
Filled Weight (Average Fill).....	4,544 lbs (2,061 kg)
Water Capacity (Average Fill)	435 US gallons (1,647 Liters)
Filled Weight (Spa Volume).....	5,336 lbs (2,421 kg)
Water Capacity (Spa Volume)	530 US gallons (2,006 Liters)
Electronic Controls	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1.....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Pump 2.....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump	Yes, 8-Hour
Total PowerPro® Jets	47 (plus 2 IR Therapy Lights)
Seat A Jets	2 PowerPro® NX2, 3 PowerPro® MX
Seat B Jets.....	2 PowerPro® NX2, 6 PowerPro® RX
Seat C Jets.....	2 PowerPro® FX Large
Seat D Jets.....	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® PX
Seat E Jets.....	2 PowerPro® RX, 2 PowerPro® FX
Seat F Jets.....	4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational
Footwell (G).....	8 PowerPro® FX Small, 1 PowerPro® FX Large
Massage Selectors	2
Air Controls.....	4, On/Off rocker switch air controller
Water Management System	One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
Export (50 Hz):	ClearRay Active Oxygen® System
LED Lighting	Waterfall light, massage selectors, cupholders, underwater, indicator light, and exterior lights (standard)
ProFinish™ Cabinet Colors	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Midnight, Monaco, Porcelain (while quantities last)
Headrests	4
Waterfall	One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
Heater:	North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional).....	SmartTub® Module (Must order with the True™ Water Sytem)
Audio System (Optional)	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm head-phone jack port; 4 premium speakers, a powered subwoofer



Jacuzzi J-485

Operation/Seat Depths

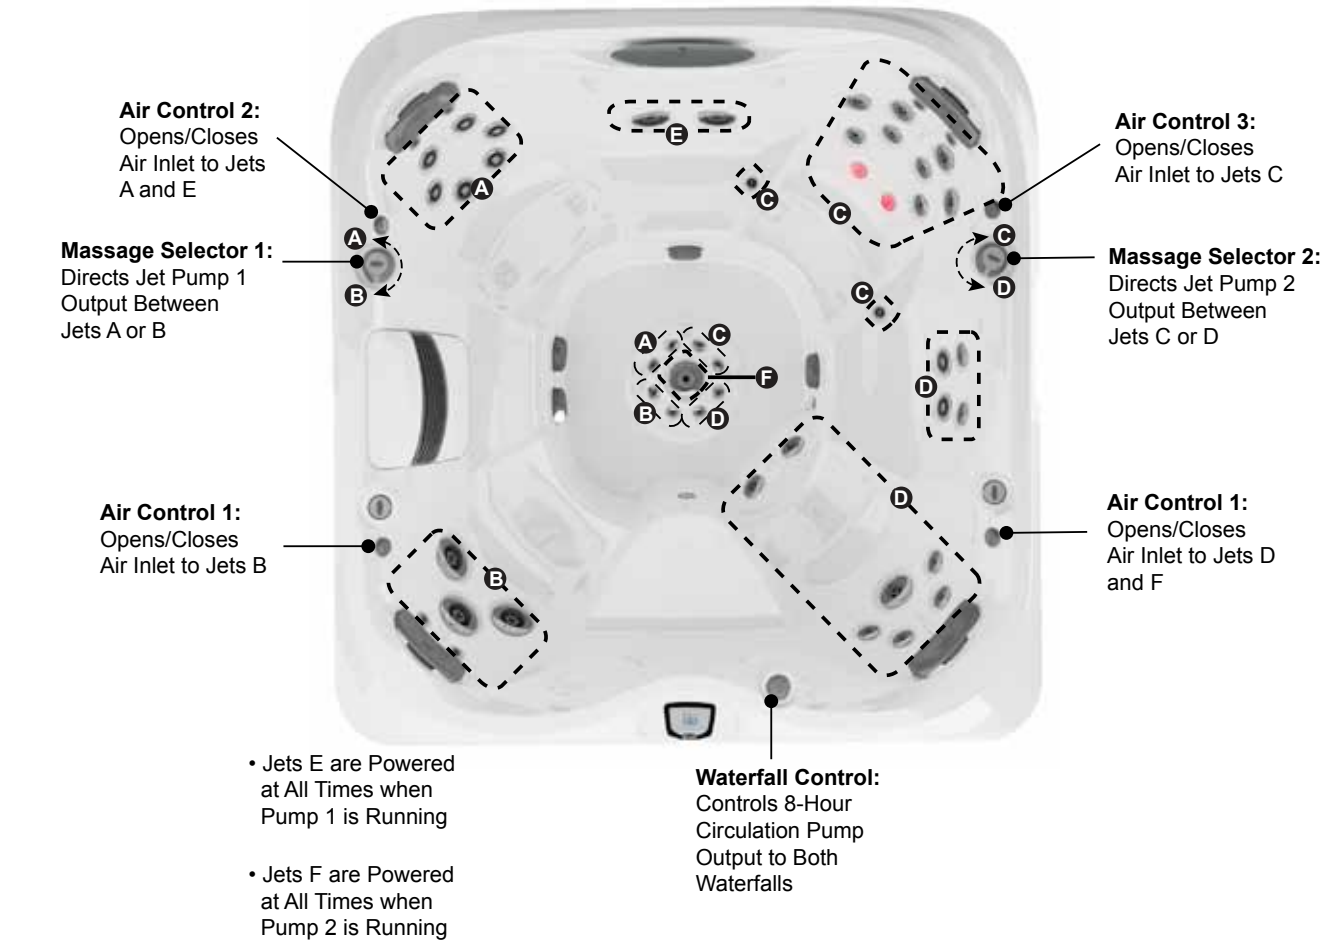

47 Total Jets (plus 2 IR Therapy Lights)




Spa Operation Subject to Change without Notice


Seat Depths

A = 25.25" (64.14 cm)
B = 23.00" (58.42 cm)
C = 29.50" (74.93 cm)
D = 23.25" (59.06 cm)
E = 29.25" (74.30 cm)
F = 21.00" (53.34 cm)

G = 27.38" (69.55 cm)
H = 17.25" (43.82 cm)
I = 32.50" (82.55 cm)



Listed dimensions
represent distance
from top of acrylic to
lowest point in seat.
**Tolerance $\pm 0.5"$
(1.27 cm).**

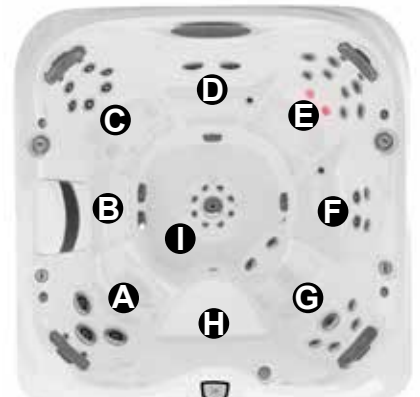


Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-485

Dimensions


TOP VIEW

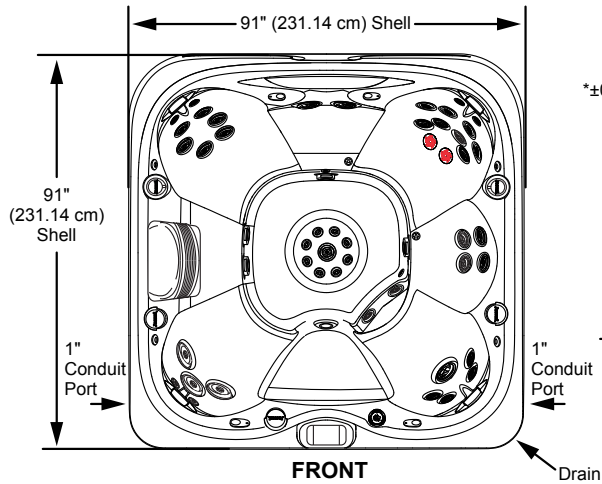

Equipment Bay/Pump Access
True™ Water Care, Optional BLUEWAVE®,
and SmartTub System
located behind the cabinet

FRONT VIEW


Tolerance: $\pm 0.5"$ (1.27 cm)

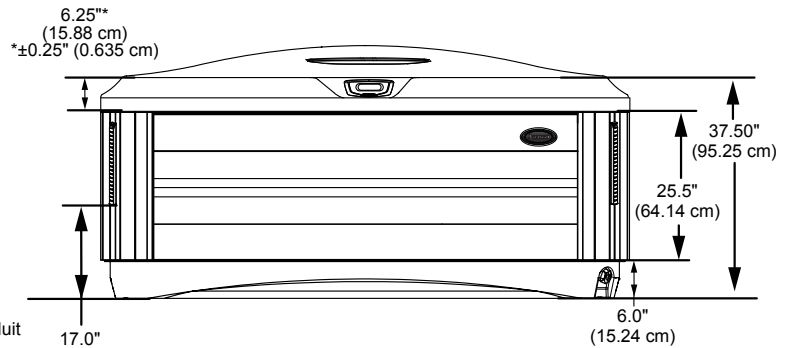

RIGHT SIDE VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

BACK

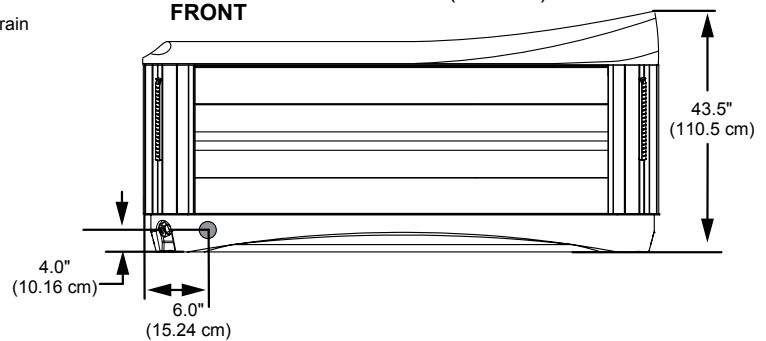


Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

STOP

***IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

STOP

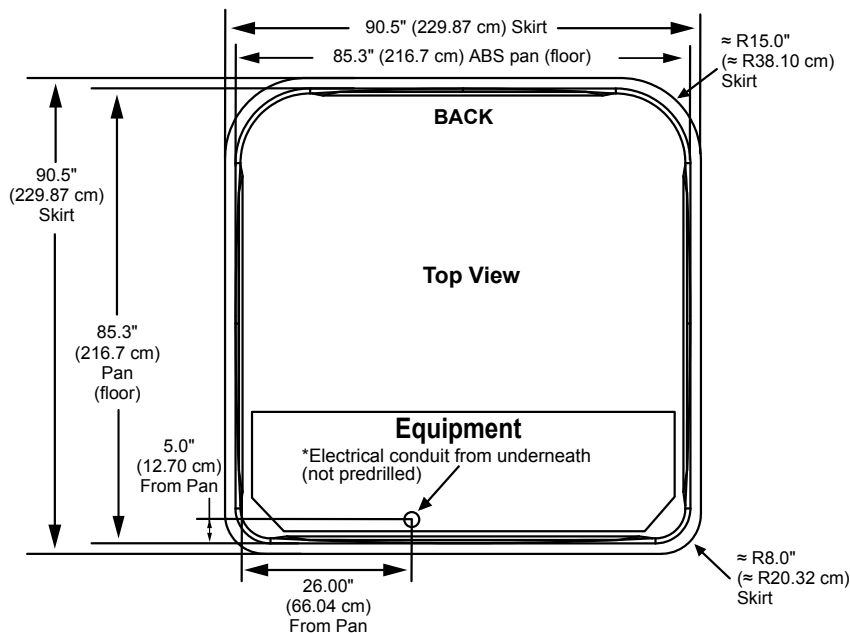

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)