


Jacuzzi J-LX


Specifications

Seating Capacity.....	6-7
Dimensions	89" x 89" x 34" (226.06 cm x 226.06 cm x 86 cm); For complete dimensions, see page 80
Dry Weight.....	855 lbs (388 kg)
Filled Weight (Spa Volume)	4,525 (2,052 kg)
Filled Weight (Average Fill).....	3,607 lbs (1,636 kg)
Water Capacity (Spa Volume)	440 US gallons (1,666 Liters)
Water Capacity (Average Fill)	330 US gallons (1,249 Liters)
Electronic Controls	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1.....	North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Pump 2.....	North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump.....	Yes, 8-hour
Total PowerPro® Jets.....	41 (plus 2 IR Therapy Lights)
Seat A Jets	2 PowerPro® NX2, 2 PowerPro® RX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX
Seat B Jets	2 PowerPro® FX Large Rotational, 2 PowerPro® MX, 2 PowerPro® FX
Seat C Jets	4 PowerPro® RX
Seat D Jets	2 PowerPro® NX2, 9 PowerPro® FX, 2 IR Therapy Lights
Seat E Jets	3 PowerPro® FX
Seat F Jets	2 PowerPro® NX2, 2 PowerPro® RX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX
Seat G Jets	2 PowerPro® NX2
Massage Selector	1
Air Controls.....	4, On/Off rocker switch air controller
Water Management System.....	One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
Export (50 Hz):	ClearRay Active Oxygen® System
LED Lighting	Two underwater light with 4 color modes, waterfall lights, exterior corner lights
Cabinet	Modern Hardwood, Brushed Gray, Smoked Ebony
Acrylic Colors	Platinum, Porcelain
Headrests	4
Waterfalls	One; Independent flow rate (on or off) adjustment powered by pump 1
Heater:	North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, or 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*.....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year True™ Water System, 2 Years Lights; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights
Special Features (Optional).....	SmartTub® Module (Must order with the True™ Water Sytem)
Audio System (Optional).....	N/A

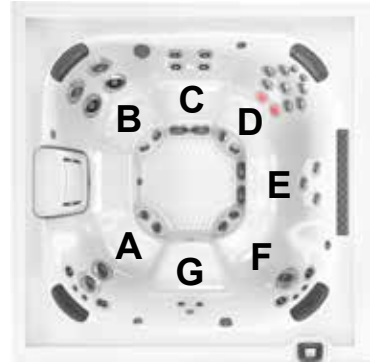

Jacuzzi J-LX

Operation/Seat Depths

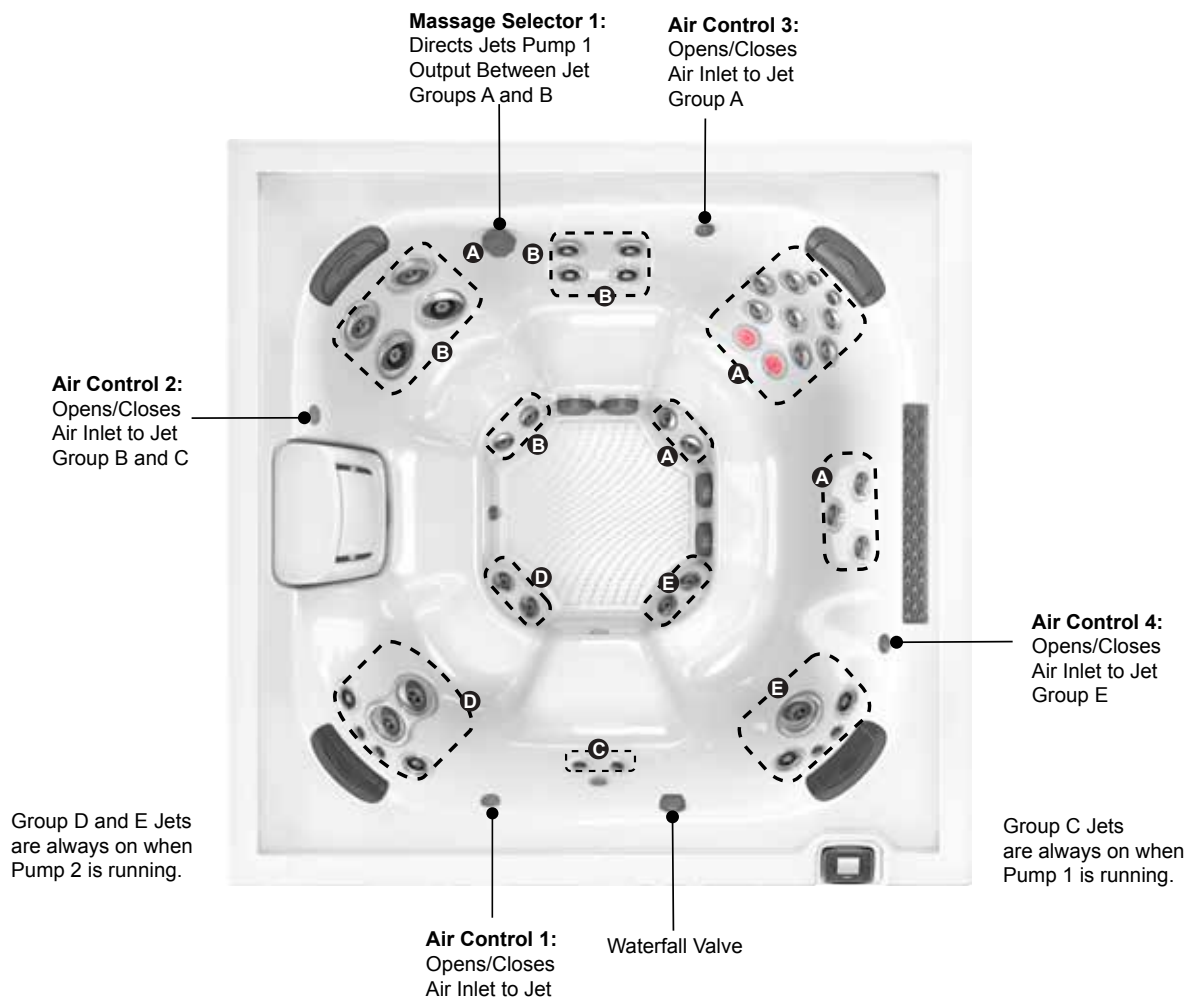

41 Total Jets (plus 2 IR Therapy Lights)



Spa Operation Subject to Change without Notice

Seat Depths

A = 24.25" (61.60 cm)
B = 21.13" (53.66 cm)
C = 26.13" (66.36 cm)
D = 20.50" (52.07 cm)
E = 26.81" (68.10 cm)

F = 25.00" (63.50 cm)
G = 26.31" (66.83 cm)
H = 18.00" (45.72 cm)
I = 31.00" (78.74 cm)

Listed dimensions represent distance from top of the deck to lowest point in seat.
Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice


Jacuzzi J-LX

Dimensions


TOP VIEW

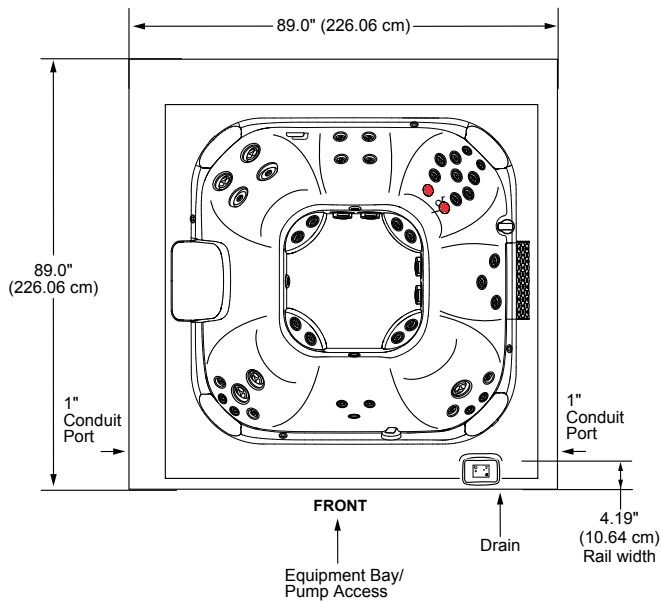


FRONT/BACK SIDE VIEW

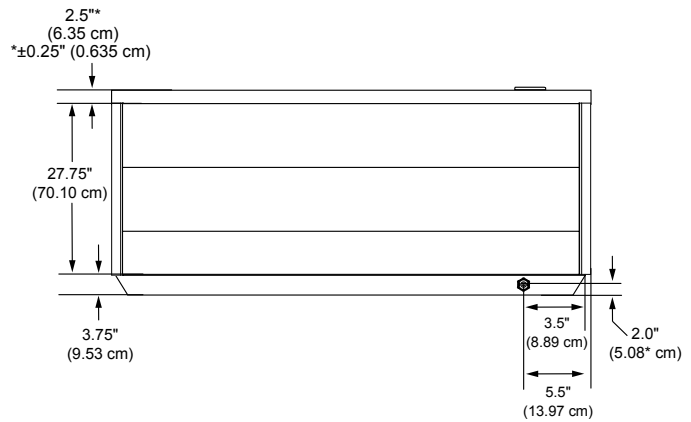

RIGHT SIDE VIEW

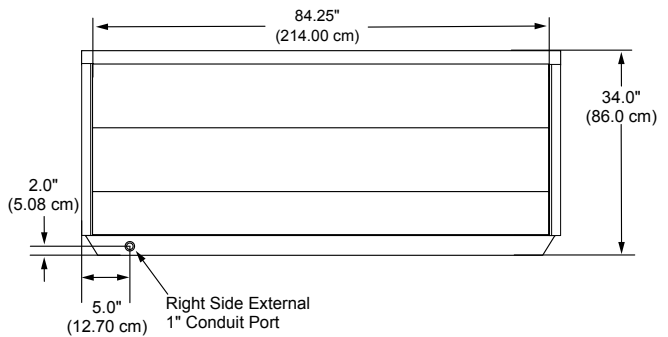

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

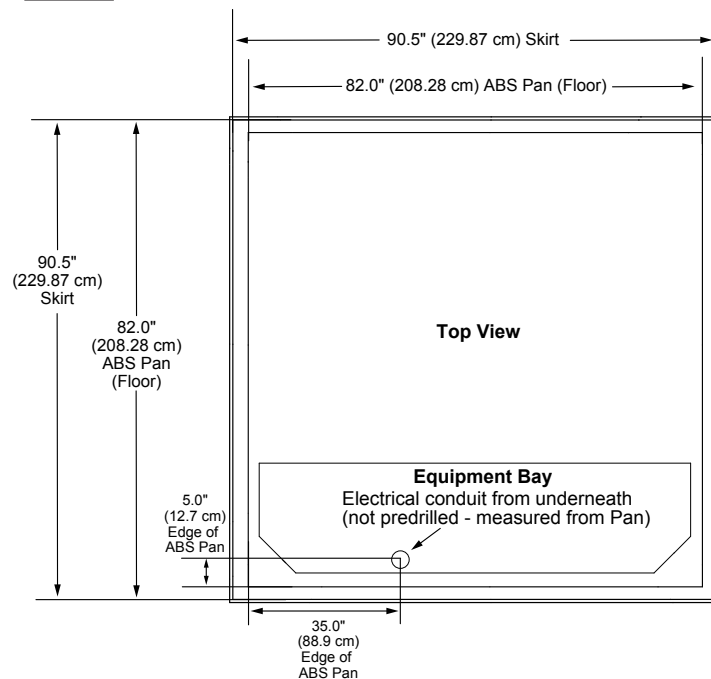

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)